

# 600U/T

## Steel Dump Body

Lighter weight Crossmemberless design for Greater Payloads and Increased Revenue



Dump Body



Shown with 9 panel tailgate and barn door options.

# 600T



Bolt on half cabshield is standard on uninstalled units

The Godwin 600U/T series body features a weight saving smooth crossmemberless understructure, a shock absorbing rubber cushioned mount, and a durable AR 450 steel floor with 12" radius corners for cleaner dumping. There are enough length, side height and material options to suit your specific needs. A zinc powder coat primer under powder coat topcoat, and half cabshield are standard features.

Visit Godwin  
Manufacturing online  
[www.godwinmfg.com](http://www.godwinmfg.com)



### Specifications:

Body lengths from 14' to 20' in 6" increments  
Side Heights 42", 48", 54" and 60"

#### FLOOR:

3/16" AR 450 one-piece floor with 60" wide flat surface before 12" radius to sides.

#### SIDES:

One piece 10 gauge 50K minimum yield with fully boxed top rails, material shedding lower rails, full depth rear posts, ladders and grab handles both side and front, continuous weld.

#### UNDERSTRUCTURE:

Crossmemberless design with 3/16" formed trapezoid longitudinal members with rubber cushion in formed track.

#### FRONT WALL:

10 gauge 50K minimum yield steel with horizontal formed inverted "V" reinforcements.

#### TAILGATE:

Three panel 10 gauge 50K minimum yield steel with full Perimeter bracing and two intermediate horizontal braces continuous weld.

#### TAILGATE HARDWARE:


Heavy duty cast steel upward acting top hardware with air operated adjustable cast steel overshot lower hardware and spreader chains. Banjo eyes near bottom of gate control opening you select.

#### LIGHTING:

FMVSS 108 required lights and reflectors. L.E.D. lights are recessed and rubber grommet mounted.

#### OPTIONS:

- 1/4" AR 450 floor in lieu of 3/16"
- 1/4" AR 450 sides
- 3/16" 50K minimum yield steel sides, front and gate
- 3/16" AR 450 sides and gate
- Air high lift or two-way barn door tailgate

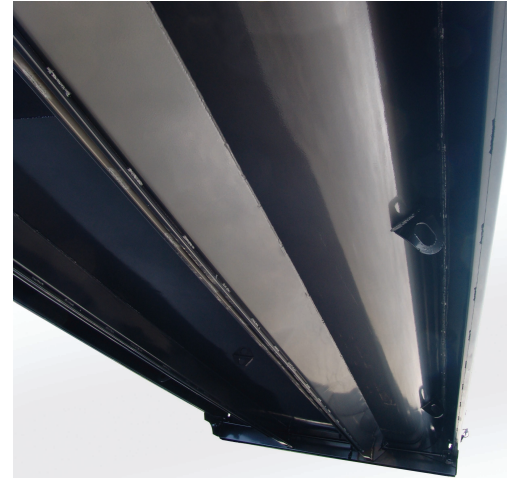

Above is the 600U/T's crossmemberless understructure and formed long sills with rubber cushion.



Optional air operated high lift tailgate with other options shown.



Shown is the inside of the 600U/T body and 12" floor to side radius.