

**POWDER
COATED
PRIMER**


Telescopic Support

Hoist and Equipment™

CHAMPION



The telescopic support is designed to clamp to itself, not the cylinder, and will not distort the barrel of the cylinder due to clamping

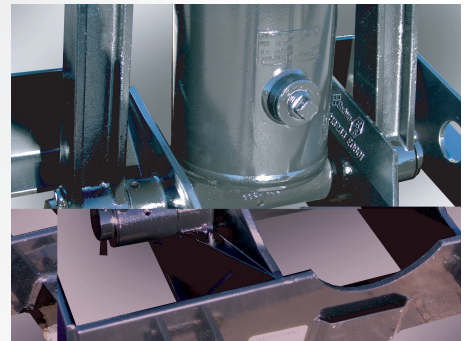

The telescopic support pivots with the cylinder and will not slide against the barrel of the cylinder.

The single telescopic cylinder support serves as a guide to help maintain the cylinder perpendicular to its mounting base support using a common pivot shaft with the cylinder.

Visit Champion Hoist and Equipment™ and all affiliated companies on the world wide web.
www.championtruckhoist.com

Telescopic support



6" side shift during 35° dump.

This cylinder support is designed to fit most telescopic cylinders, including the three major brands and is designed for new and aftermarket applications.

When ordering, specify the make and model of your cylinder.

Patents Pending



Scan this code for a video demonstration of the telescopic support in action!

Only a 6" side shift at a 35° dump angle. Truck was side loaded with 12,360 lbs of loose material. The body sat at 5° to the right with 0° dump angle due to side weight. This test was performed on a double frame Sterling with 52000 GVWR. The body was 16 foot long with a 74135 telescopic hoist.



Sitting at 5° to the right before dump

Champion Hoist and Equipment™
200 Champion Drive
Dunn, NC 28334
(910) 897-4995 Fax (910) 897-7306